



BlackBerry Curve 8900 Screen Replacement

When the display screen is cracked or damaged and needs to be replaced.

Written By: Renae Bishop



INTRODUCTION


Work area should be lint free, clean and well lit.



TOOLS:

- [T6 Torx Screwdriver](#) (1)
 - [iFixit Opening Tools](#) (1)
-

Step 1 — Screen

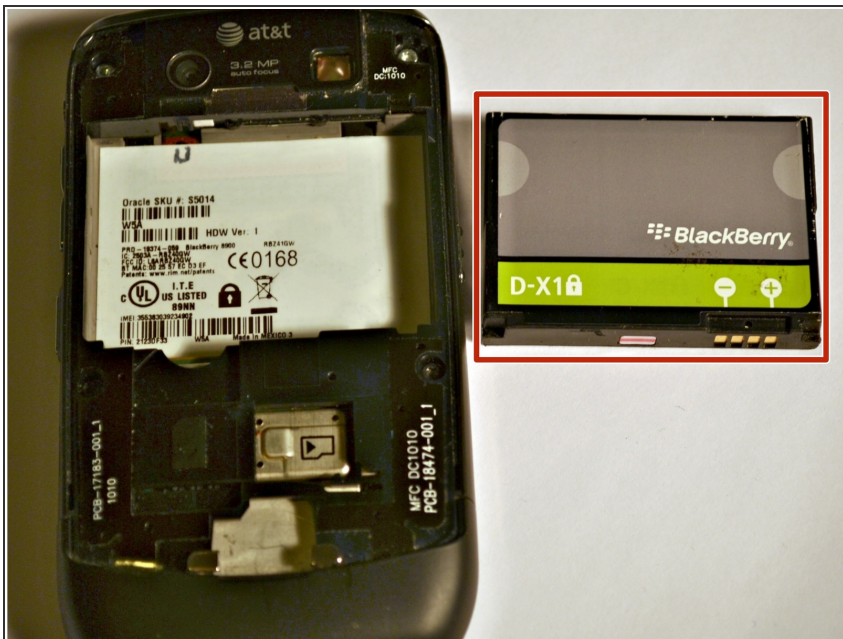

- Open the rear panel to expose the chassis assembly.
- Remove the battery.

Step 2



- Use a small non-marring plastic opening tool to remove the lower rear cover.

Step 3




- Use a T6 Torq screw to loosen and remove the six screws from the chassis as shown.

Step 4



- Remove the midframe from the phone.

Step 5

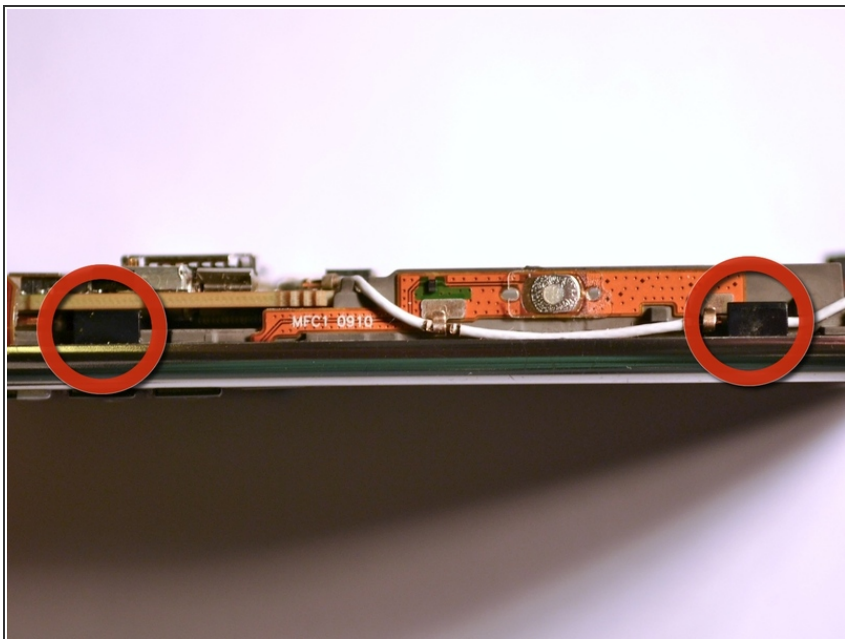


- Remove the remaining core assembly from the case, by carefully prying the side release tabs.

Step 6





- Gently pry the side release tabs to lift the flexing keypad from the frame.
- ⓘ The navigation ball may come loose at this point. Set it aside with the keypad for reassembly.

Step 7

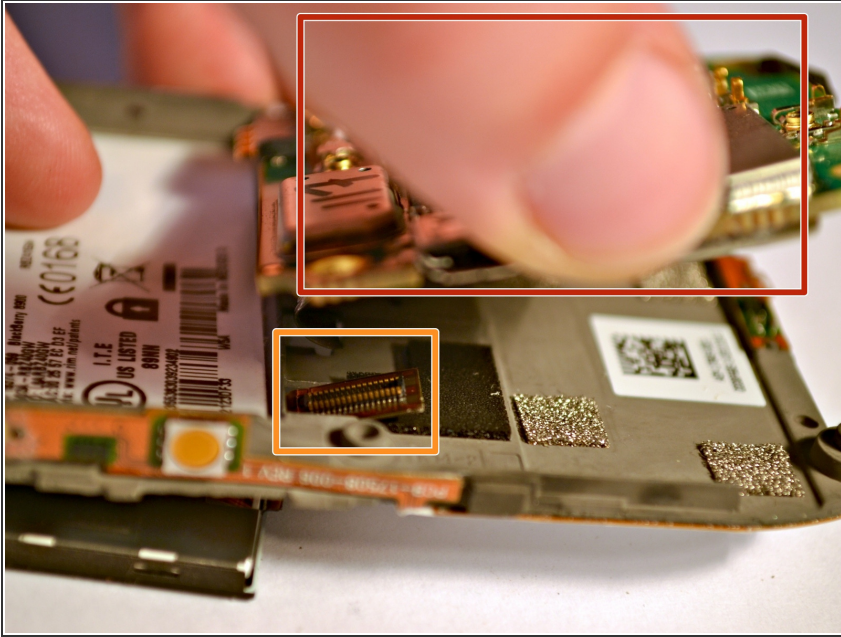

- Gently lift the motherboard.
- Locate the screen's ribbon cable underneath the motherboard, and detach it from the phone.

Step 8

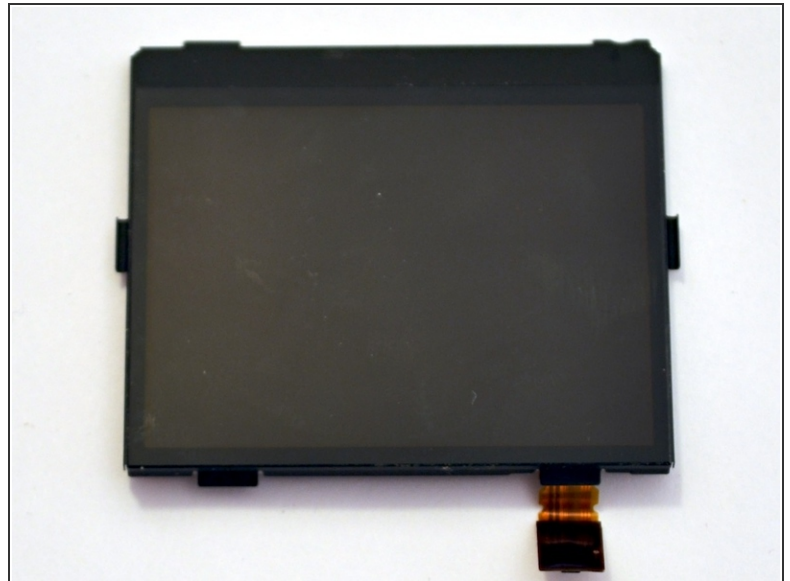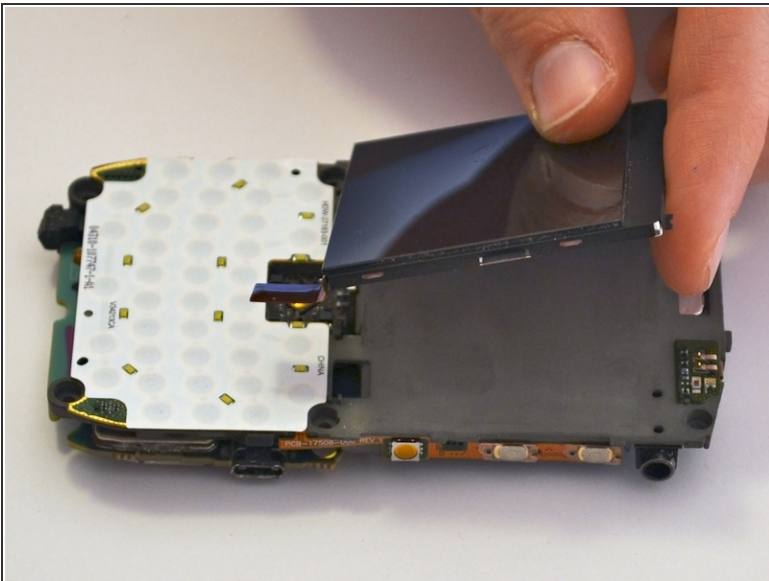

- Carefully pry at the sides of the screen until the display assembly is free. Remove the display from the motherboard unit,
- Insert the replacement display assembly and reverse the directions to re-assemble.

To reassemble your device, follow these instructions in reverse order.

This document was last generated on 2017-06-25 12:05:41 PM.